Product images







Brief description


High-quality 2-way built-in loudspeaker for ceiling installation.

Purchase order items

Scope of delivery

- 2 x loudspeakers
- 2 x cover grid
- Release hooks for the cover grids
- Installation instructions

Product diagram

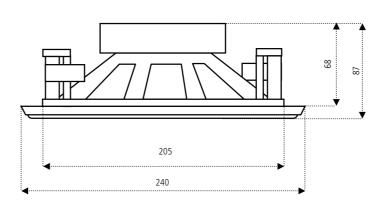

Technical data

Design:

Round, 2-way

Dimensions:

Ø 240 mm

Cutout:

 \varnothing 205 mm

Installation depth:

68 mm

Weight:

1080g/pc

Sub-woofer/mid-range driver:

6 ½" (16.5 cm)

Tweeter:

13 mm Dome

Membrane material:

PP (Polypropylene)

Output:

50 watts max.

Impedance:

8 Ohm

Sensitivity:

86 dB (1 watt/1m)

72 Hz-20 kHz

Frequency range:

Hooks with screws accessible from the front

Locking:

Conforms to CE:

Conforms to RoHS:

yes yes

